

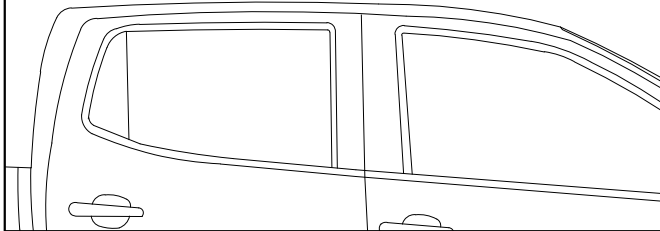





MAZDA BT 50 / ISUZU D- MAX ROOF

Use these measurements to cut and remove original roof ditch rubber sections.

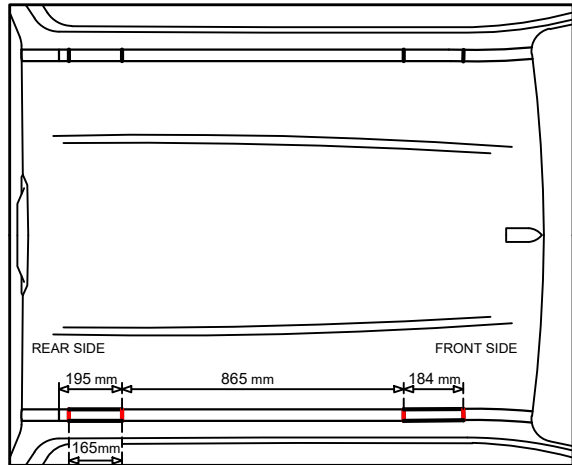


TMX RR 103239 SET BOLT KIT

Item N°	Part	Description	Qty
15	M8 1,25 flange nylock nut		4
22	M8 1.25 X 25 ALLEN CAP		12
26	M8 washer		12

MAZDA BT 50 / ISUZU D-MAX 103240



TMX RR 012 103239 LH - RH

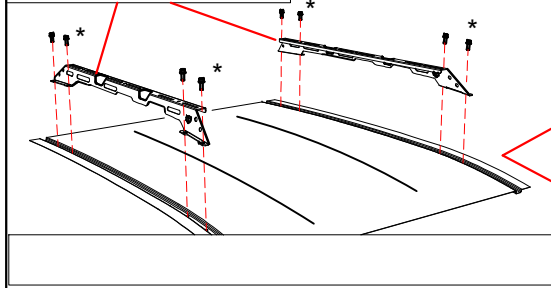

- 1- Use SEALANT around all roof holes before place brackets to protect and seal.
- 2- Clean the sealant excess after placement of roof-brackets.

